



**Utförande:** Lackerad metall och gjuten aluminium. Riktbart armaturhus.  
Fyra ställbara avbländningsklaffar. Metallhalogen har spridning 24 grader.  
**Anslutning:** Universaladapter 3-fas alt. fast montage med kopplingsplint 2x2,5mm<sup>2</sup>.  
**Design:** Thomas Bernstrand, Mattias Ståhlbom 2007.


W	MODELL/MODEL	FÄRG/FINISH	ART
35W/G12	Med adapter/With adapter	Vit/White	7760-1-01
35W/G12	Med adapter/With adapter	Svart/Black	7760-1-06
70W/G12	Med adapter/With adapter	Vit/White	7761-1-01
70W/G12	Med adapter/With adapter	Svart/Black	7761-1-06
26W/Gx24q	Med adapter/With adapter	Vit/White	7766-1-01
26W/Gx24q	Med adapter/With adapter	Svart/Black	7766-1-06
35W/G12	Fast mont/Fixed installation	Vit/White	7763-1-01
35W/G12	Fast mont/Fixed installation	Svart/Black	7763-1-06
70W/G12	Fast mont/Fixed installation	Vit/White	7764-1-01
70W/G12	Fast mont/Fixed installation	Svart/Black	7764-1-06
26W/Gx24q	Fast mont/Fixed installation	Vit/White	7765-1-01
26W/Gx24q	Fast mont/Fixed installation	Svart/Black	7765-1-06

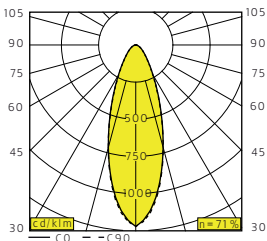

**Finish:** Ceiling fixture with adjustable spotlight. Painted steel and die-casted aluminium. Metal halide has light beam 24 degrees.  
**Connection:** Fixed installation, terminal block 2x2,5mm<sup>2</sup> or with adapter for 3-circuit track installation.  
**Design:** Thomas Bernstrand, Mattias Ståhlbom 2007.

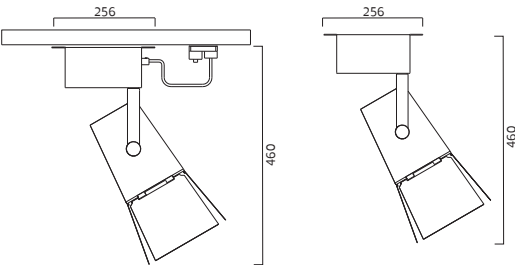

Metalhalogen/Metal halide

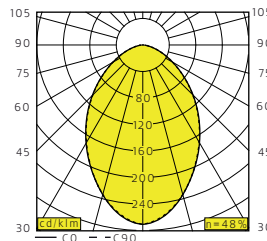

Kompaktlysrör/Compact fluorescent

