

Structural

Design by Arik Levy.

Reference

2630.

Application

Ceiling Lamps

Installation type

Surface

Description

Ceiling light with basic lines and cubic volumes that form sculptures integrated into the architecture.

Diffuser

Polycarbonate diffuser

Materials

Body: Aluminum
Diffuser: Polycarbonate
Profile: Aluminum

Finish



2630-15 Grey L2 (NCS S 2500-N)



2630-21 Grey D1 (NCS S 7000-N)

Sketch



Electrical characteristics

1 x LED PLATE 24V 9W



Total 9.0 W



VIBIA



Light source: 3000K CRI >90

Driver included: CV - Constant Voltage 110-240V 50/60Hz

Electronic dimming: 1-10V

Optional dimming: DALI or Casambi

Technical characteristics

- Main input by the biggest box

Physical characteristics

1 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.0000 m³ /

Gross weight 0.0 kg. / Net weight 0.0 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting - opaque shade

Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



Photometric data

Efficiency : 51.19 lm/W

Coordinate system : CG

Total flux : 565.65 lm

Maximum value : 270.71 cd


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

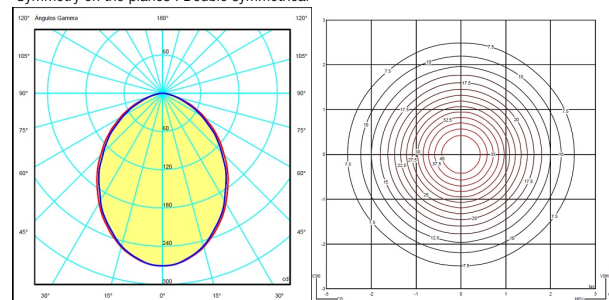

Certificates



